


METALLIZED POLYPROPYLENE FILM CAPACITOR – X2

NON – INDUCTIVE, (UL940V-0) PLASTIC CASE SEALED WITH EPOXY RESIN

FEATURES >

- ◆ Provides interference suppression with VDE & ENEC and UL safety approvals.
- ◆ Used in across-the-line, interference suppression circuit.

Class X2 Film Capacitor - TS08H >

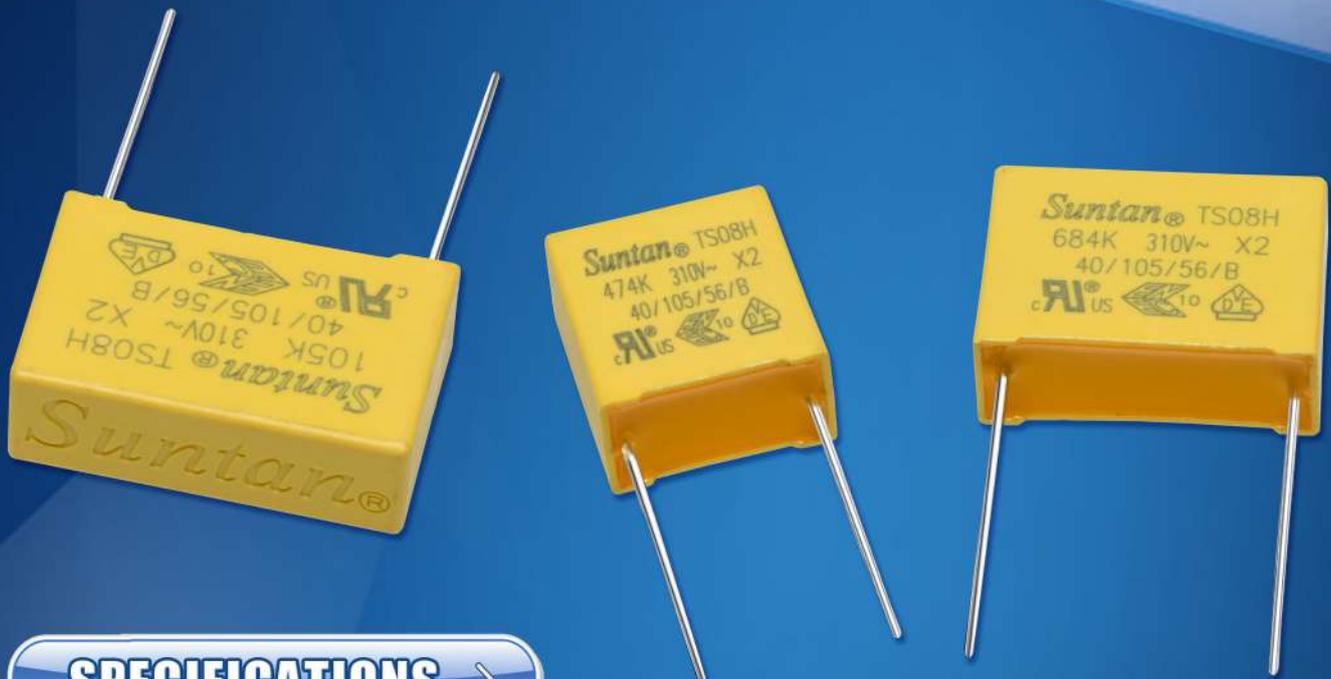

SPECIFICATIONS >

- ◆ Voltage Rating : 310 VAC
- ◆ Capacitance Range : 0.0047 – 10 μ F
- ◆ Capacitance Tolerance : \pm 10% std.
- ◆ Operating Temperature : -40°C to 105°C
- ◆ Testing Voltage : 4.3UR DC /5s
- ◆ Insulation Resistance : CR \leq 0.33 μ F, I.R \geq 15,000M Ω
CR $>$ 0.33 μ F, I.R \geq 5,000S (20°C, 100V, 1min)

Suntan® Technology Company Limited
All Kinds of Capacitors

CERTIFICATIONS >

	COUNTRY	APPROVAL STANDARD	APPROVAL NO.	CLASS	CAP.RANGE	RATED VOLTAGE
cUL/UL	CANADA/U.S.A	UL/IEC 60384-14	E344971	X2	0.0047 to 10 μ F	310/305/275VAC
VDE	GERMANY	DIN EN 60384-14 (VDE 0565 Teil 1-1)	40046769	X2	0.0047 to 10 μ F	310/305/275VAC
ENEC	EUROPE	EN 60384-14; IEC 60384-14	40046769	X2	0.0047 to 10 μ F	310/305/275VAC

DRAWINGS >

