
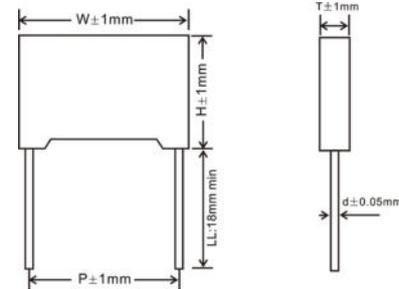


TS07B

FEATURES

- High reliability at high current stress.
- Self-healing properties.
- Flame retardant plastic case and epoxy resin.
- Low losses, high dv / dt capability.
- High moisture resistance.
- High stability of capacitance and long life.



SPECIFICATIONS	
OPERATING TEMPERATURE	-40°C TO + 85°C
RATED VOLTAGE	250, 400, 630VDC
CAPACITANCE RANGE	0.0047 TO 3.9µF
CAPACITANCE TOLERANCE	±5%, ±10%
INSULATION RESISTANCE	C ≤ 0.33µF ; IR ≥ 50000MOhm C > 0.33µF ; IR ≥ 15000MOhm
DISSIPATION FACTOR	0.1% max. at 1KHz, 20°C
DIELECTRIC STRENGTH	160% of rated voltage for 60s.

µF	250VDC					400VDC					630VDC				
	W ±1.0	H ±1.0	T ±1.0	P ±1.0	d ±0.05	W ±1.0	H ±1.0	T ±1.0	P ±1.0	d ±0.05	W ±1.0	H ±1.0	T ±1.0	P ±1.0	d ±0.05
0.0047	13	9	4	10	0.6	13	9	4	10	0.6	13	9	4	10	0.6
0.0056	13	9	4	10	0.6	13	9	4	10	0.6	13	9	4	10	0.6
0.0068	13	9	4	10	0.6	13	9	4	10	0.6	13	9	4	10	0.6
0.0082	13	11	5	10	0.6	13	11	5	10	0.6	13	11	5	10	0.6
0.01	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
0.012	--	--	--	--	--	13	9	4	10	0.6	13	11	5	10	0.6
0.015	--	--	--	--	--	13	11	5	10	0.6	13	12	6	10	0.6
0.018	--	--	--	--	--	13	11	5	10	0.6	13	12	6	10	0.6
0.022	--	--	--	--	--	13	11	5	10	0.6	--	--	--	--	--
0.027	13	11	5	10	0.6	13	11	5	10	0.6	13	12	6	10	0.6
0.033	13	11	5	10	0.6	13	11	5	10	0.6	18	11	5	15	0.6
						18	11	5	15						
0.039	13	11	5	10	0.6	13	11	5	10	0.6	--	--	--	--	--
						18	11	5	15						
0.047	13	11	5	10	0.6	13	11	5	10	0.6	18	11	5	15	0.6
						18	11	5	15						
0.056	13	11	5	10	0.6	18	11	5	15	0.6	18	11	5	15	0.6
						13	11	5	10	0.6	18	11	5	15	0.6
0.068	18	11	5	15	0.6	18	11	5	15	0.6	26.5	15	6	22.5	0.8
						13	12	6	10	0.6	18	12	6	15	0.8
0.082	18	11	5	15	0.6	18	11	5	15	0.6	26.5	15	6	22.5	0.8
						13	12	6	10	0.6	18	12	6	15	0.8
0.1	18	11	5	15	0.6	18	11	5	15	0.6	26.5	15	6	22.5	0.8
						18	12	6	15	0.8	18	13.5	7.5	15	0.8
0.12	18	12	6	15	0.8	18	12	6	15	0.8	26.5	16.5	7	22.5	0.8
						18	12	6	15	0.8	18	13.5	7.5	15	0.8
0.15	18	12	6	15	0.8	18	12	6	15	0.8	26.5	16.5	7	22.5	0.8
						18	12	6	15	0.8	18	14.5	8.5	15	0.8
0.18	18	12	6	15	0.8	26.5	15	6	22.5	0.8	26.5	17	8.5	22.5	0.8
						--	--	--	--	--	31.5	19.5	10.8	27.5	0.8
0.22	18	13.5	7.5	15	0.8	18	13.5	8	15	0.8	18	16	10	15	0.8
						26.5	15	6	22.5	0.8	26.5	15	6	22.5	0.8
0.27	18	13.5	7.5	15	0.8	18	13.5	8	15	0.8	31.5	19.5	10.8	27.5	0.8
						26.5	15	6	22.5	0.8	18	16	10	15	0.8
0.33	18	14.5	9	15	0.8	26.5	15	6	22.5	0.8	26.5	19	10	22.5	0.8
						18	16	10	15	0.8	31.5	19.5	10.8	27.5	0.8
0.39	26.5	16.5	7	22.5	0.8	26.5	15	6	22.5	0.8	26.5	19	10	22.5	0.8
						32	18	9	27.5	0.8	31.5	19.5	10.8	27.5	0.8
0.47	18	13.5	7.5	15	0.8	26.5	17	8.5	22.5	0.8	26.5	19	10	22.5	0.8
						26.5	16.5	7	22.5	0.8	31.5	19.5	10.8	27.5	0.8
0.56	26.5	17	8.5	22.5	0.8	26.5	17	8.5	22.5	0.8	31.5	21.6	13	27.5	0.8
						31.5	19.5	10.8	27.5	0.8	31.5	21.6	13	27.5	0.8
0.68	26.5	19	10	22.5	0.8	26.5	19	10	22.5	0.8	31.5	25	14	27.5	0.8
						31.5	19.5	10.8	27.5	0.8					
0.82	26.5	19	10	22.5	0.8	26.5	19	10	22.5	0.8	--	--	--	--	--
						32	18	9	27.5	0.8	31.5	19.5	10.8	27.5	0.8
1.0	26.5	21.5	12	22.5	0.8	26.5	22	12	22.5	0.8	--	--	--	--	--
						32	20	11	27.5	0.8	31.5	19.5	10.8	27.5	0.8
1.2	32	20	11	27.5	0.8	31.5	21.6	13	27.5	0.8	--	--	--	--	--
1.5	32	22	13	27.5	0.8	31.5	21.6	13	27.5	0.8	--	--	--	--	--
1.8	32	22	13	27.5	0.8	31.5	21.6	13	27.5	0.8	--	--	--	--	--
2.2	32	22	13	27.5	0.8	--	--	--	--	--	--	--	--	--	--
2.7	32	22	13	27.5	0.8	--	--	--	--	--	--	--	--	--	--
3.3	32	24.5	15	27.5	0.8	--	--	--	--	--	--	--	--	--	--
3.9	32	25.5	16	27.5	0.8	--	--	--	--	--	--	--	--	--	--

Note: Specification are subject to change without notice. For more detail and update, please visit our website.